

ASPEN FABRIC BLACK FRAME WITH WALL MOUNT

REESORT EXTRUSIONS
PRODUCT CODE: AFBLKWM



On Frame

OnGraphic



PRODUCT DESCRIPTION

A classic in the Resort Extrusion collection, the Aspen SEG Fabric Frame is the perfect blend of versatility and class. Aspen's outside finish has a line groove, like an indented stripe, for added style, but is purposeful for easily installing accessories. This wall mounted option is great for showrooms, retail stores or anywhere needing that extra marketing power.

The Aspen 40D has a profile width of 40mm. (1.57in.). The outside finish is solid with a groove line in the center of the extrusion. The silicone beading can fit 12mm. (.47 in) deep and 4 mm. (.15 in.) wide into the trough of the frame. Not compatible with lights (cannot be backlit).

Quick Install and Set Up Overview

Remove extrusion and parts out of your packaging. Layout out your pieces. Find one of your "L" Brackets with a screw. Insert one of the corner "L" brackets to the end of one of the extrusion sticks. Tighten the brackets with the Allen Wrench provided. Then repeat with all the corners.

Next you'll want to pre-drill in your wall mounts (Provided with Graphic Package and Hardware Only options). Start with the wall mounts that will hold the top extrusion. Evenly space them out under the top extrusion frame. Don't forget to level the wall mounts. Once you have your frame and top wall mounts set. Hang the extrusion on top of the wall mounts. Then drill in the remaining wall mounts inside of the bottom extrusion to set in place your frame. Wall mounts will be hidden once you place your graphic on to the frame.

Then place your SEG (Silicone Edge Graphic) Graphics into the frame grooves, keeping a tight and finished look.

Product Applications:

- Wall Decoration for home & office
- Retail store wall advertising
- Restaurants
- Art Galleries
- Locker rooms
- Offices
- Showrooms
- Backdrops

GRAPHIC MATERIAL


Dye Sublimated Stretch Fabric

GRAPHIC FINISHING

12mm x 3mm silicone beading sewn to perimeter of graphic. A pull tab is added to bottom corner to help with graphic removal.

DISPLAY CONSTRUCTION

40mm wide aluminum extrusion profile with black powdercoat finish

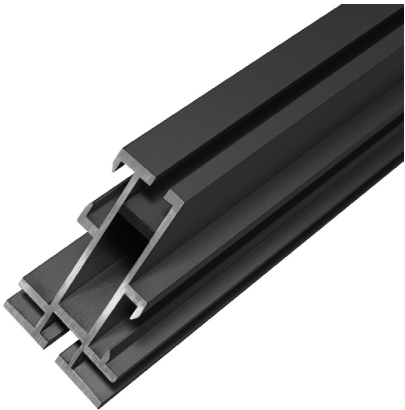

ASPEN FABRIC BLACK FRAME WITH WALL MOUNT


REESORT EXTRUSIONS
PRODUCT CODE: AFBLKWM




On Frame

OnGraphic


PARTS LIST

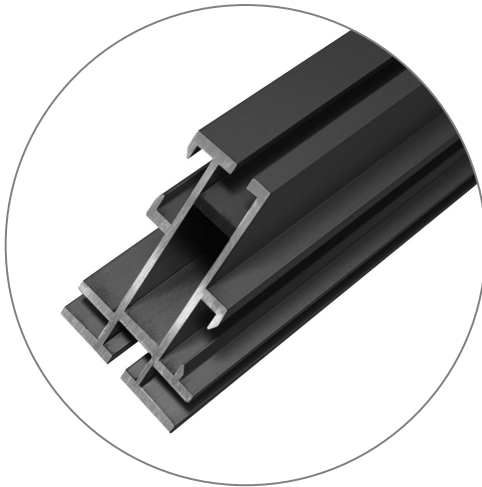

(qty 2 or 4) Top/Bottom Profiles
Lengths Longer Than 9ft are 2pc

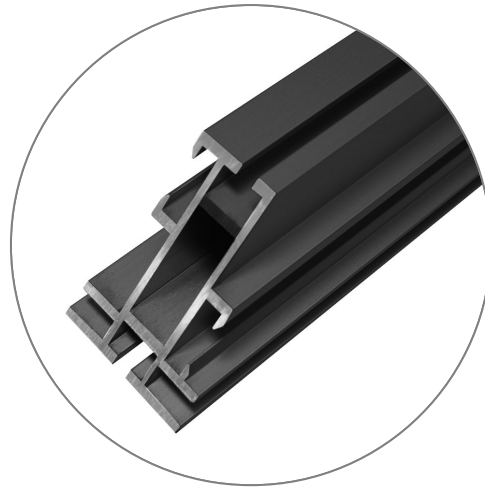

(qty 2 or 4) Left/Right Profiles
Lengths Longer Than 9ft are 2pc

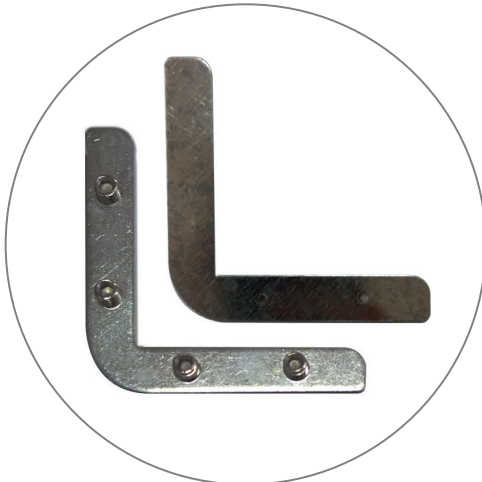

(qty 8) Aspen Corner Brackets
SKU: AF-LCON



(qty 1) 3mm Allen Key
SKU: ALLEN-3mm



(qty 2 or 4) Aspen Center Connector
SKU: AF-CENTCON
For Lengths 9ft or Wider






(qty 4) Aspen Wall Mount
w/Mounting Hardware
SKU: AF-WALLMT

FRAME ASSEMBLY INSTRUCTIONS





Split Connectors

Used to join sides of frame longer than 9ft

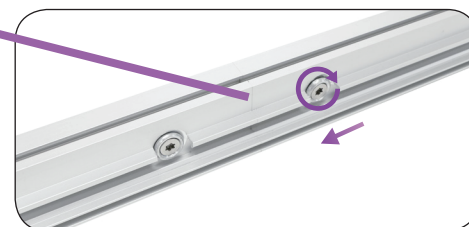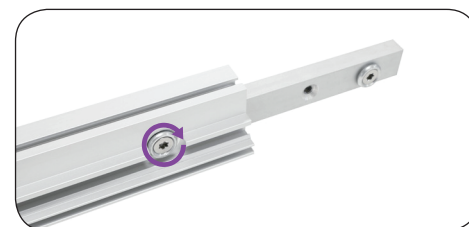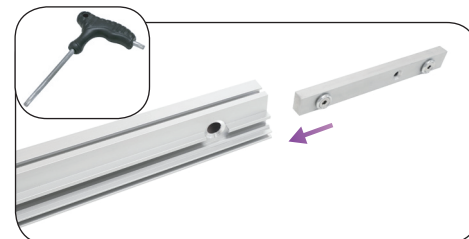

Corner Connectors

Used to join sides to top/bottom

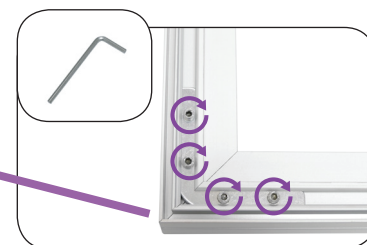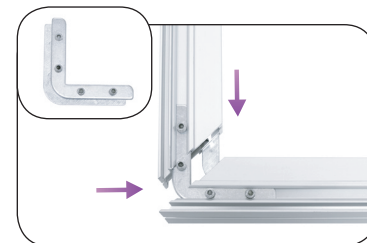

ASPEN FABRIC BLACK FRAME WITH WALL MOUNT

REESORT EXTRUSIONS


PRODUCT CODE: AFBLKWM




On Frame

OnGraphic

WALL MOUNT INSTRUCTIONS

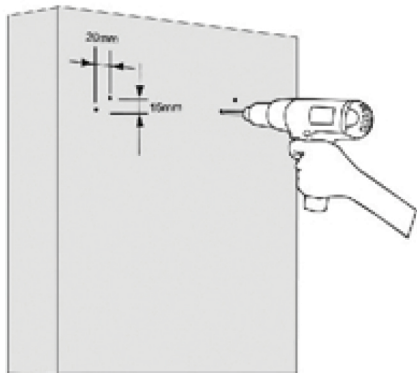


Position the wall mounts on the wall close enough for the threaded screw to be able to apply pressure to the frame. Space them evenly across the top and bottom edges of the inside edges of the frame. Mark the hole locations with a pen or marker and drill holes large enough to fit the plastic screw anchors.

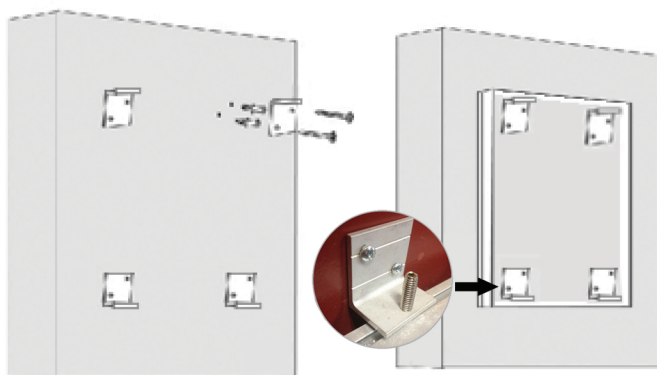

Insert wall anchors into holes, place wall mount over wall anchors making sure holes on mounts line up with anchors. Insert screws into holes and tighten them with a screwdriver to secure.

Tighten allen key screws on wall mounts to apply pressure to the frame. Repeat for all wall mounts to secure frame to the wall.

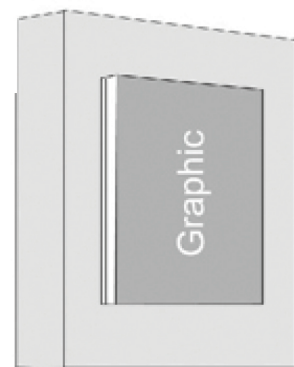

Install your graphic by tucking the silicone beading into each corner of the frame and then working your way around the edges of the frame to complete graphic installation.