

PRODUCT CODE:
ASLIMBLK

ASPEN SLIM BLACK FABRIC FRAME WALL MOUNTED

Product Features

Walls looking bland? Add an Aspen Slim SEG display to brighten up the space. From showing off photos you've taken to marketing opportunities. Our Aluminum Extrusion is lightweight, making it great for wall mounting. Once you have your frame mounted to the wall. You can change your graphics out anytime. Making it the ideal display to change out seasonal advertising and messaging.

The ASPEN SLIM ONYX has a profile width of 19mm. (.75in.). Making this single-sided SEG extrusion the thinnest of them all. Less than half the profile width of ASPEN-40D, the outside finish is solid black powder coat finish. The silicone beading can fit 12mm. (.47 in)deep and 4 mm. (.15 in.) wide into the trough of the frame. Not compatible with lights (cannot be backlit).

Specs

Specifications:


- 19 mm (.75 in) wide aluminum profile
- Black powder coat finish
- Single-sided wall mounted graphic display
- 12 mm silicone keder

Features:


- Material: Stretch Fabric
- Print Process: Dye Sub Printing
- Warranty: One (1) year on graphics
Lifetime on hardware

Includes

- **Graphic Package**
 - (4) Aspen Slim Frame Profiles
 - (4) AF-SLIM-LCON
 - (4) AF-SLIM-WALLMT
 - (1) ALLEN-3mm
 - (1) Dye Sub Fabric Graphic w/SEG Finishing
- **Hardware Only**
 - (4) Aspen Slim Frame Profiles
 - (4) AF-SLIM-LCON
 - (4) AF-SLIM-WALLMT
 - (1) ALLEN-3mm
 - (1) Dye Sub Fabric G
- **Graphic Only**
 - (1) Dye Sub Fabric Graphic w/SEG Finishing

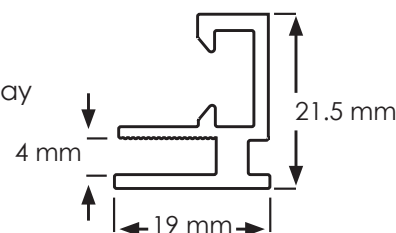

Wall Mount

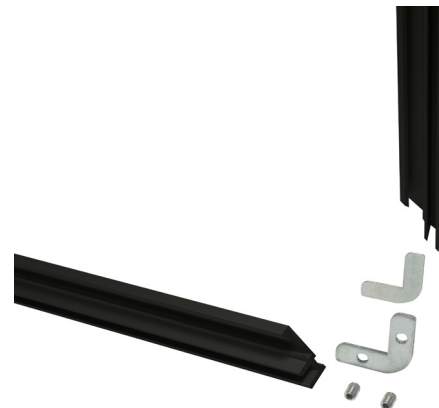

Corner Connection

ASPEN SLIM BLACK FABRIC FRAME WALL MOUNTED


FRAME ASSEMBLY INSTRUCTIONS



Corner Connector Installation


1. Align front lock plate with back pressure plate back to back
2. Slide the aligned pieces into the channel of the extrusion
3. Slide the adjacent extrusion onto the corner connector
4. Tighten screws with allen key
5. Repeat process for all sides

You can use the bracket along the vertical or horizontal section located on the inside of the frame.

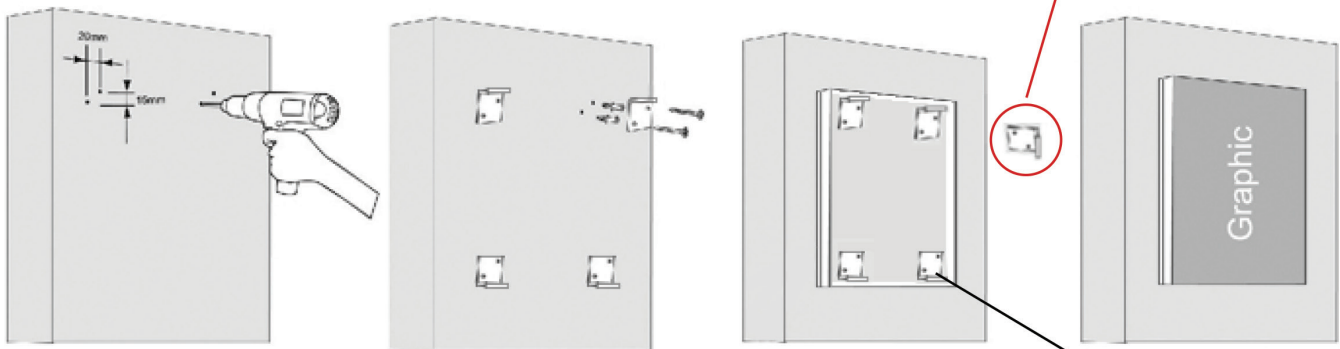

Wall Mount Installation

1. Screw 4 wall mounts to wall close enough for the threaded screw to be able to apply pressure to the frame
2. Use an allen key and tighten each screw apply pressure along each side of the frame
3. Install graphic




ASPEN SLIM BLACK FABRIC FRAME WALL MOUNTED

GRAPHIC INSTALLATION INSTRUCTIONS



a. Locate the silicone edge beading, which is sewn onto the back of the perimeter of the graphic.

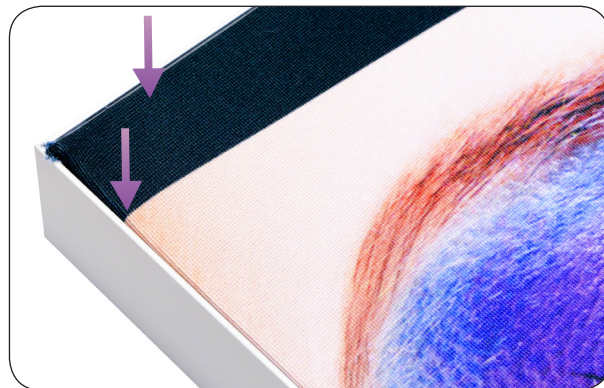


b. Insert the silicone edge beading into the silicone channel, starting at the corner.



c. At counter clockwise, continue to insert the silicone edge beading at each corner into the silicone channel.



d. Then push down from the middle.

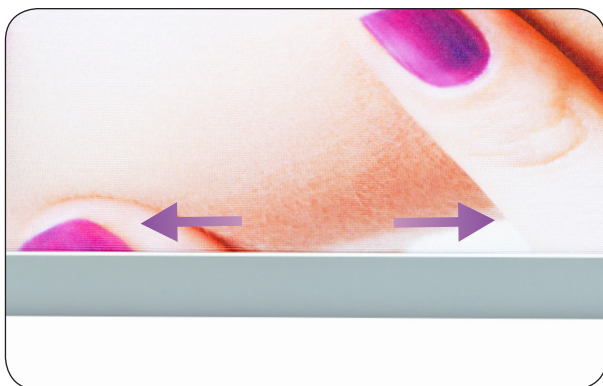

e. Work your way toward the finished corners.



f. Repeat by installing the rest of the graphic counter clockwise. Complete graphic installation.