

CABO E

RESORT EXTRUSIONS


PRODUCT CODE: CABO-E



On frame



On graphic

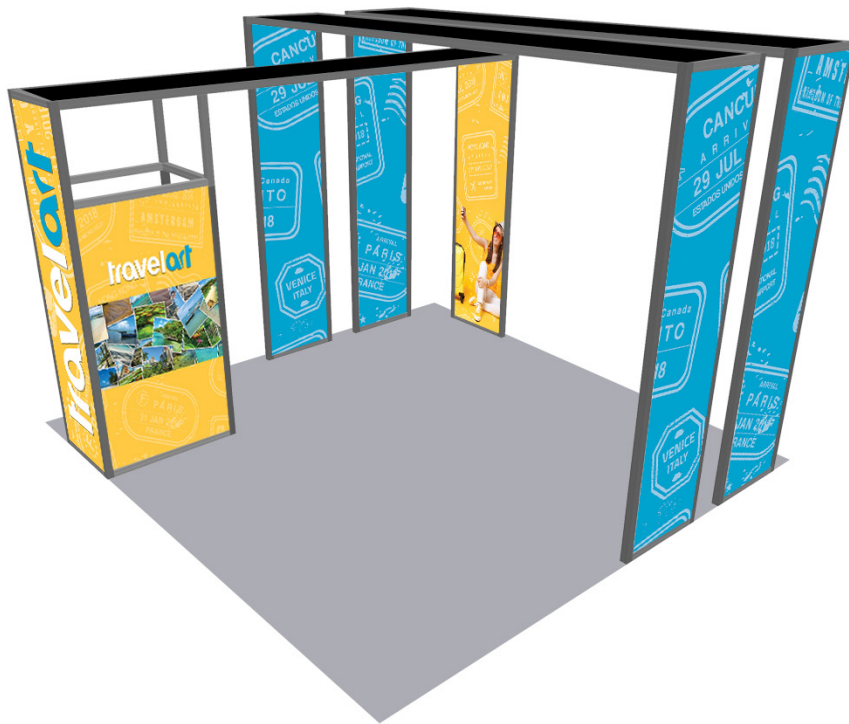

PRODUCT DESCRIPTION

The Cabo aluminum extrusion profile system is an elegant and versatile solution for all of your display needs. Featuring a sleek silver anodized finish, the Cabo is the perfect solution for tradeshow booths, retail environments, pop up shops, or any place aluminum framing is needed. The profiles are available in standard 40mm and 80mm profile widths and in different shapes allowing you to turn your display vision into reality. Promote your company, new products, etc with custom dye sublimated fabric graphics. 12mm x 3mm silicone beading (SEG) is sewn around the perimeter of each fabric panel for easy installation and removal of your graphics. Choose from one of our pre designed configurations or contact us for a quote on something totally custom.

DISPLAY DIMENSIONS	237" W x 172.25" H x 237" D
--------------------	-----------------------------

GRAPHIC SIZE	See Template Page
--------------	-------------------

GRAPHIC MATERIAL

Dye-Sublimated Black and White Fabric. Fabric graphic material with an integrated blackout. Backside of the graphics are black.

GRAPHIC FINISHING

12mm x 3mm silicone beading is sewn around the perimeter of the fabric graphics. Silicone beading is hidden from view once installed.



DISPLAY CONSTRUCTION

Extruded aluminum profile frame with aluminum and steel components


SHIPPING WEIGHTS & DIMENSIONS

Shipping Weight	1415 lbs (frame only) - LTL ONLY
(Includes Shipping Crate)	1450 lbs (frame & graphic) - LTL ONLY


Shipping Crate Dimensions	102"L x 49.5"W x 44.5"H
---------------------------	-------------------------

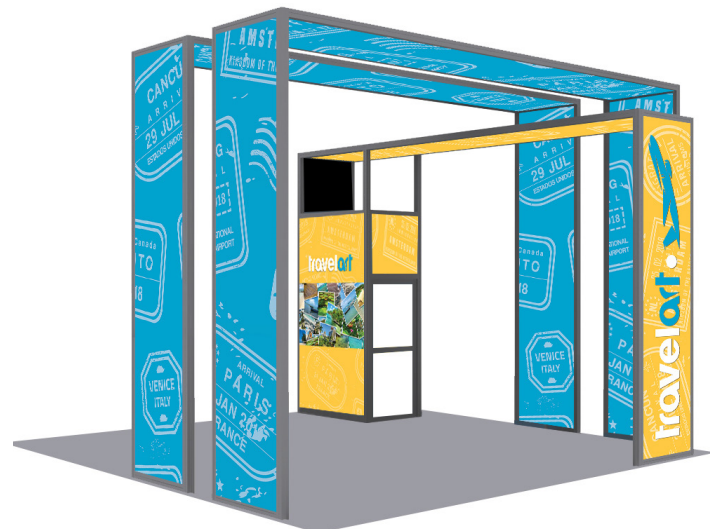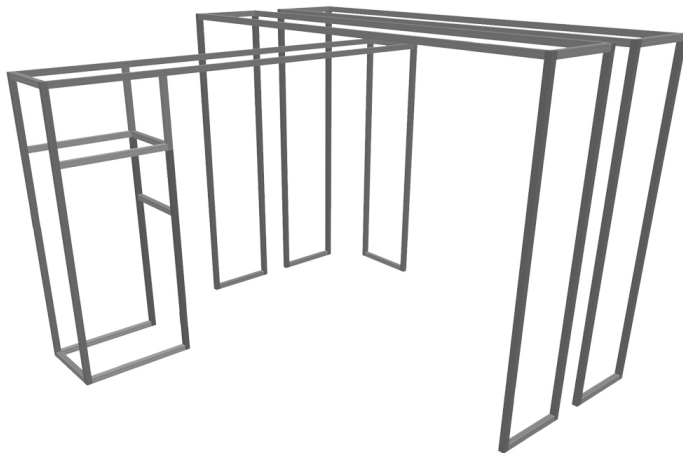


PARTS LIST HARDWARE ONLY




CABO-80 172.2" W
(qty 8)




CABO-80 152.8" W
(qty 4)




CABO-80 149.6" W
(qty 2)




CABO-80 230.7" W
(qty 6)

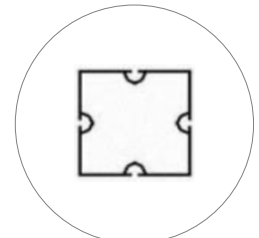


CABO-80 55.3" W
(qty 4)




CABO-80 37.375" W
(qty 14)




CABO-80-LOCK
(qty 52)




CABO-DOOR
(qty 1)




(CABO-80-ADPT)
(qty 1)

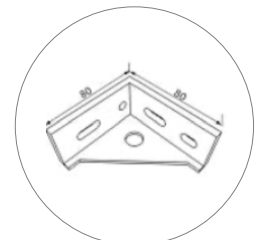


CABO-CS
(qty 8)




CABO-80-SEG 146.4" W
(qty 4)




CABO-80-SEG 165.9" W
(qty 4)




CABO-80-SEG 37.275" W
(qty 10)




CABO-80-SEG 146.4" W
(qty 2)

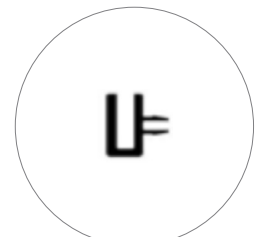


CABO-80-SEG 165.9" W
(qty 4)




CABO-80-SEG 37.275" W
(qty 10)




CABO-SEG-PLASTIC 230.6" W
(qty 6)




CABO-SEG-PLASTIC 110.6" W
(qty 4)



CABO-SEG-PLASTIC 55.2" W
(qty 4)

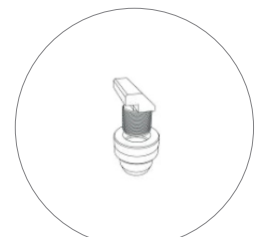

CABO-HHS
(qty 140)



CABO-TTORX
(qty 1)




CABO-LTORX
(qty 1)




CABO-TSCREWDRIVER
(qty 1)

Template Guide

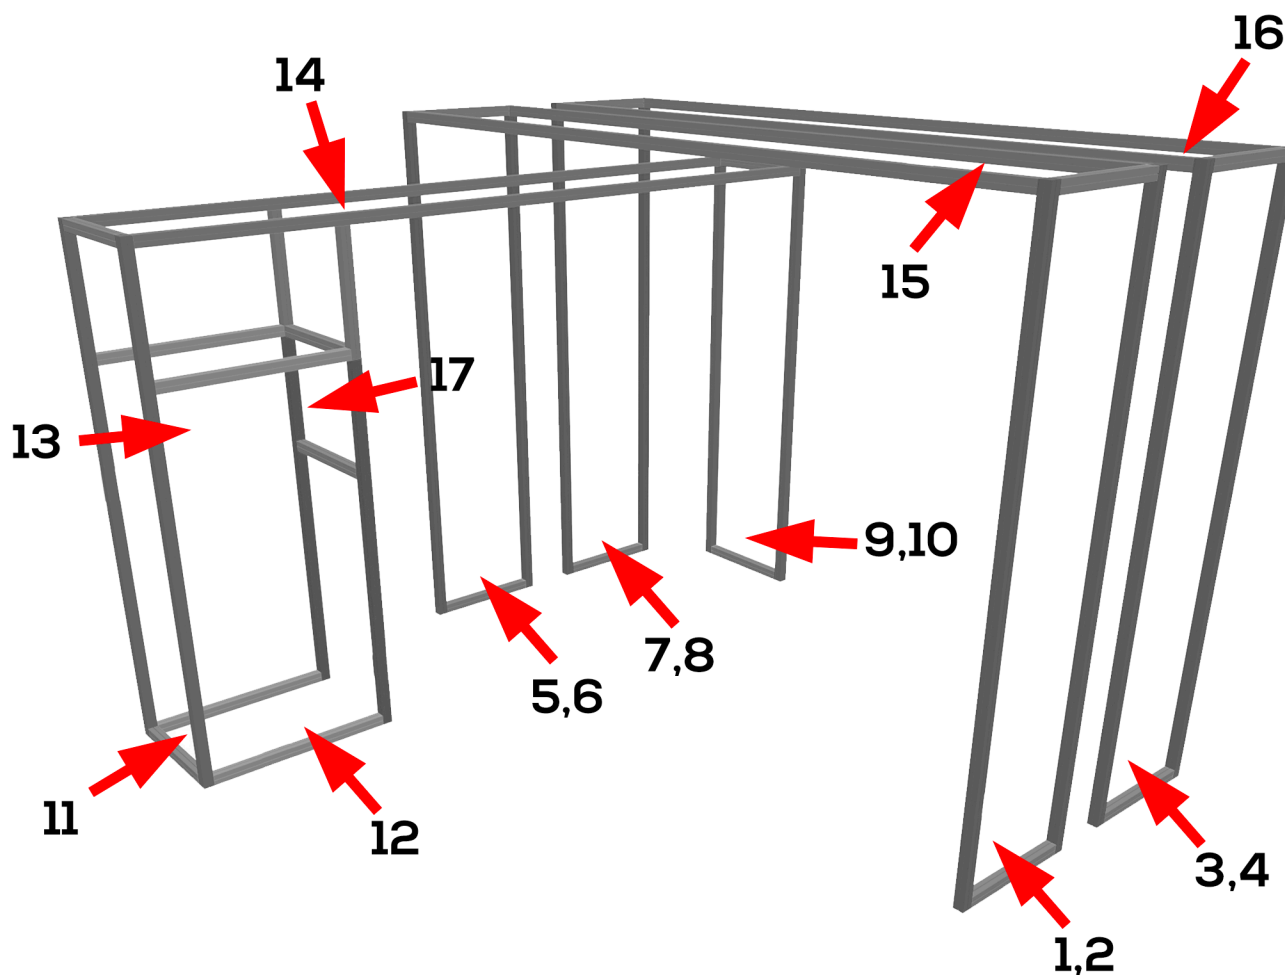


PANEL	DIMS	NOTES
1	37.875" W x 166" H	Inside Print
2	37.875" W x 166" H	Outside Print
3	37.875" W x 166" H	Inside Print
4	37.875" W x 166" H	Outside Print
5	37.875" W x 166" H	Inside Print
6	37.875" W x 166" H	Outside Print
7	37.875" W x 166" H	Inside Print
8	37.875" W x 166" H	Outside Print
9	37.875" W x 146.5" H	Inside Print
10	37.875" W x 146.5" H	Outside Print
11	37.875" W x 146.5" H	Outside Print
12	55.3" W x 110.6"H	Outside Print
13	55.3" W x 110.6"H	Outside Print
14	37.875" W x 230.7" H	Bottom Print Short Archway
15	37.875" W x 230.7" H	Bottom Print Tall Archway
16	37.875" W x 230.7" H	Bottom Print Tall Archway
17	37.875" W x 31.9" H	Outside print

Frame Assembly

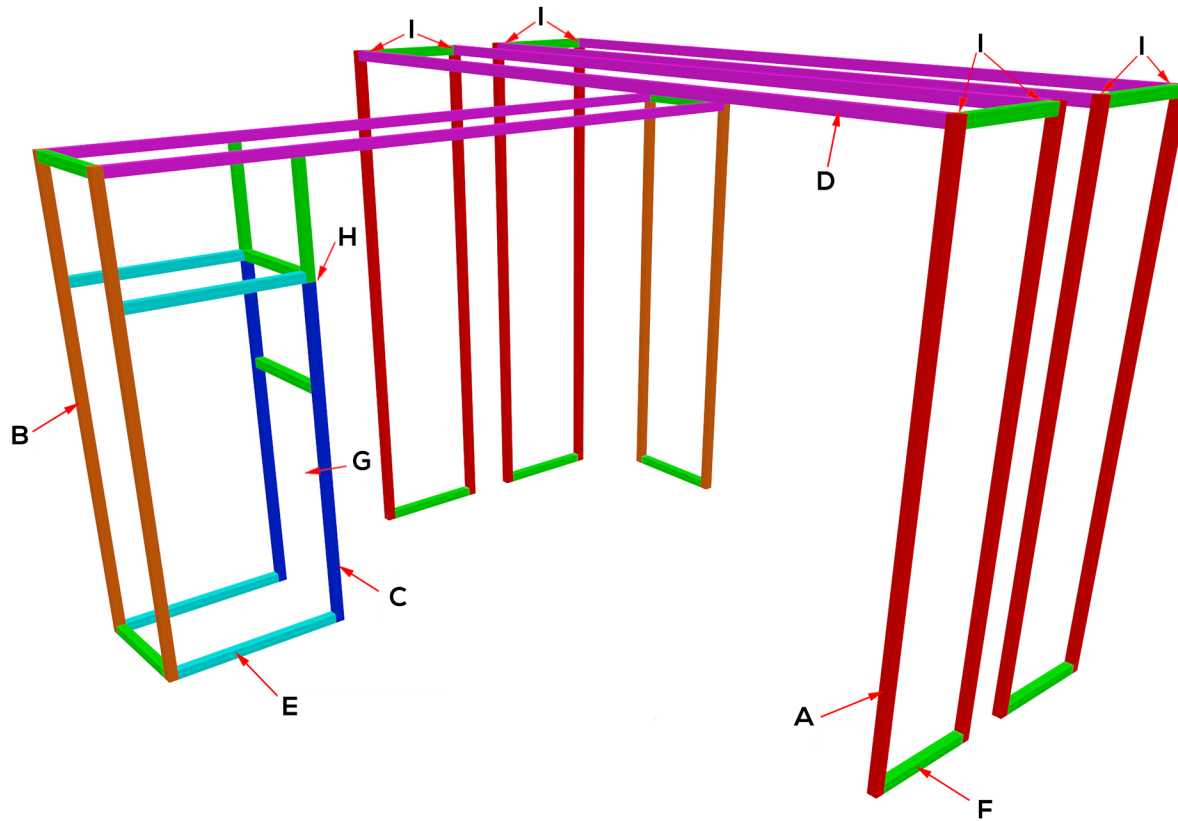


REF	SKU	QTY	Length In
A	CABO-80	8	172.2"
B	CABO-80	4	152.8"
C	CABO-80	2	149.6"
D	CABO-80	6	230.7"
E	CABO-80	4	55.3"
F	CABO-80	14	37.375"
G	CABO-DOOR	1	n/a
H	CABO-80-ADPT	1	n/a
I	CABO-CS	8	n/a

Lock/Connector Instructions

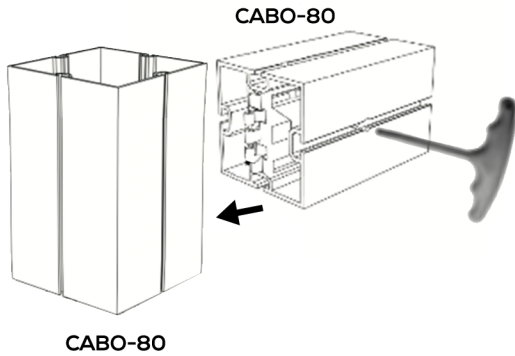


CABO-80 Profile Connection

1. Line up lock with system groove on vertical profile
2. Insert teeth of lock into groove
3. Use torx tool to tighten lock (turn clockwise to tighten)



CABO-CS Installation


1. Insert hammerhead screws through holes in CABO-CS (make sure "hook" side of screw is on the flat side of the bracket)
2. Place CABO-CS into inside 90° corner of profiles and insert hammerhead screw into system groove on profile
3. Tighten nut on hammerhead screw to secure CABO-CS into place

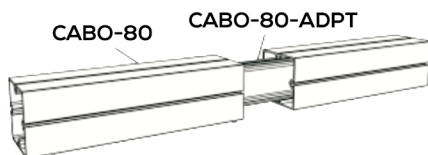


CABO-80-ADPT Connection

1. Insert CABO-80-ADPT into one CABO-80 profile
2. Slide opposing CABO-80 profile onto CABO-80-ADPT
3. Tighten screws on CABO-80-ADPT to secure profiles in place

SEG Attachments

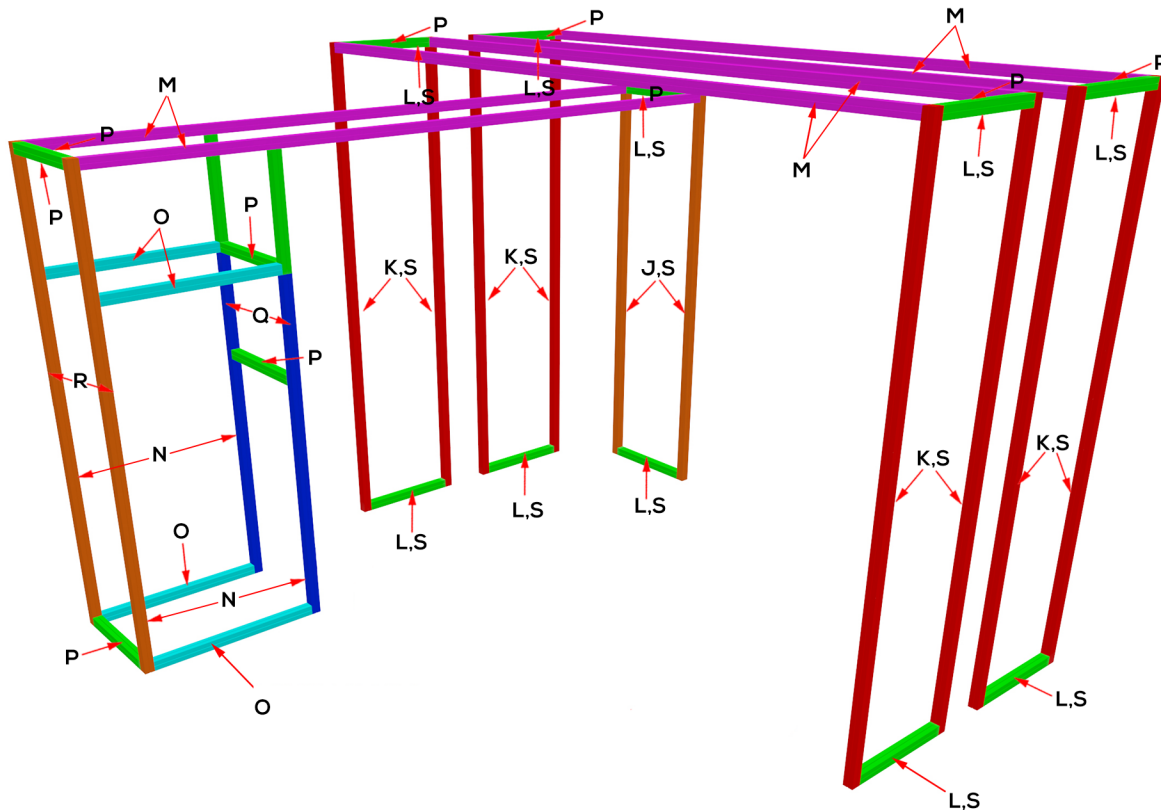


REF	SKU	QTY	Length In
J	CABO-80-SEG	2	146.4
K	CABO-80-SEG	8	165.9
L	CABO-80-SEG	10	37.275
M	CABO-SEG-PLASTIC	6	230.6
N	CABO-SEG-PLASTIC	4	110.6
O	CABO-SEG-PLASTIC	4	55.2
P	CABO-SEG-PLASTIC	10	37.275
Q	CABO-SEG-PLASTIC	2	31.8
R	CABO-SEG-PLASTIC	2	146.4
S	CABO-HHS	140	



CABO-SEG-PLASTIC Installation

1. Line up clip of CABO-SEG-PLASTIC with system groove of profile
2. Press CABO-SEG-PLASTIC down to lock into place.



CABO-80-SEG Installation

1. Unscrew CABO-HHS and feed through holes on CABO-80-SEG
2. Line up CABO-HHS with system groove on profile CABO-80-SEG will attach to
3. Tighten CABO-HHS clockwise to secure

DOOR INSTALLATION



Product Description

Standard Aluminum Door Be hinged on the right open out against you Includes two piece of plywood panel. 2000*950mm

Door Dimensions

78.125" H x 40.82 W x 1.57 D

Shipping Weight

32 Lbs

Door Construction

Aluminum Frame and hinges

