



FRAME ASSEMBLY

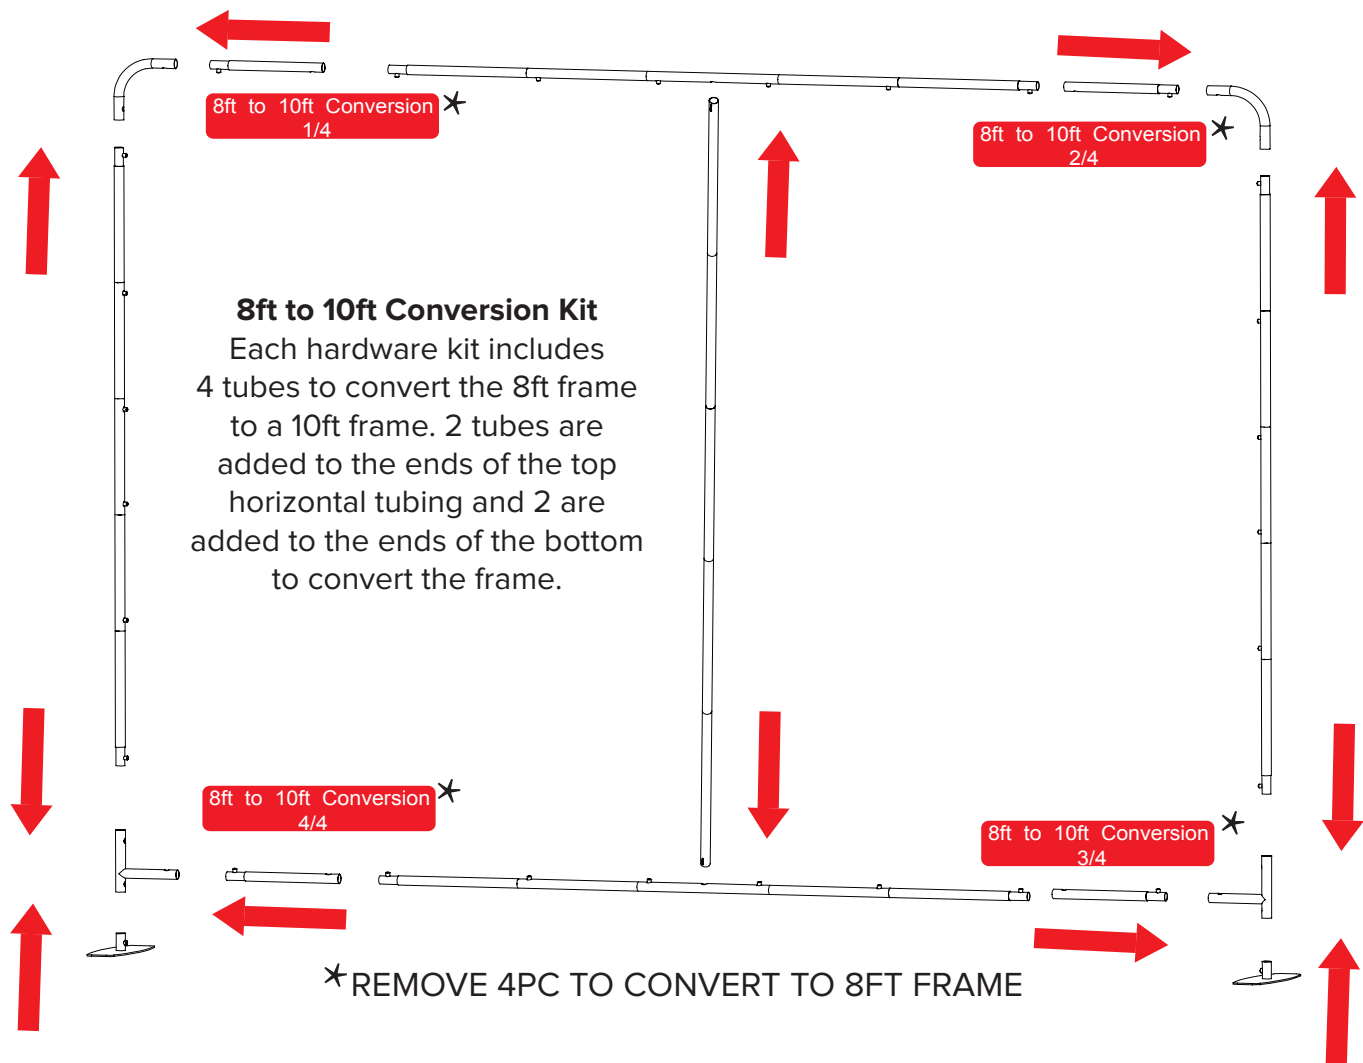


TUBE CONNECTION

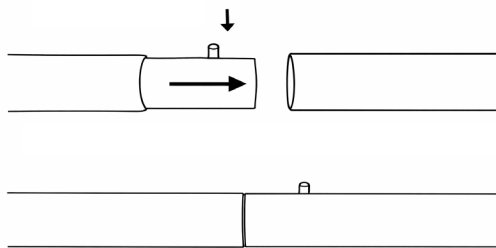


PRESS BUTTON & INSERT
REDUCED END INTO RECEIVING
END OF TUBING

GRAPHIC INSTALLATION



PULL GRAPHIC OVER FRAME

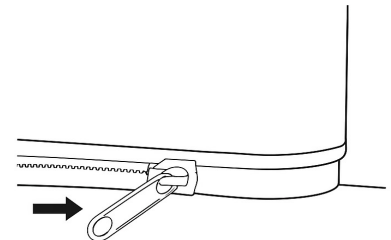


ZIP GRAPHIC CLOSED
UNDER BOTTOM TUBE


GUIDE TO RESETTING YOUR COMBINATION LOCK



LOCK OVERVIEW

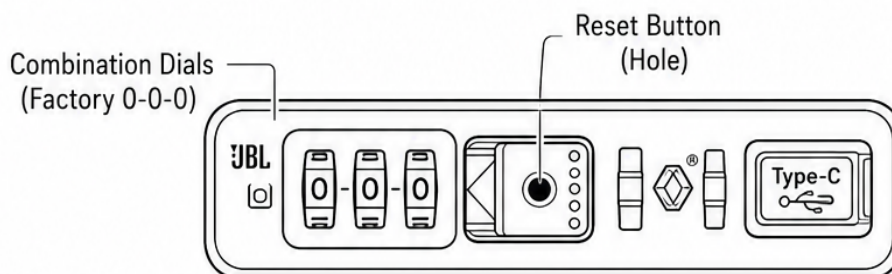


1 START OPEN

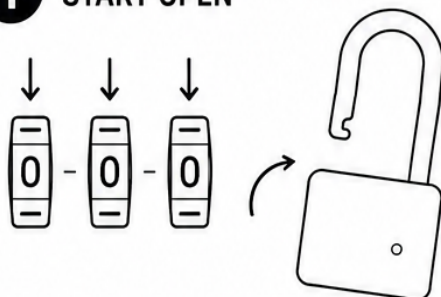


Turn dials to factory default '0-0-0' and **OPEN** the lock shackle.

2 PRESS RESET

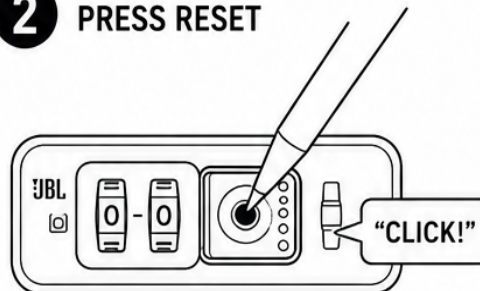


Insert a pen tip (or paperclip) into the **RESET BUTTON** hole. Push firmly until you hear a "**CLICK!**" and the button stays in.

3 SET YOUR CODE

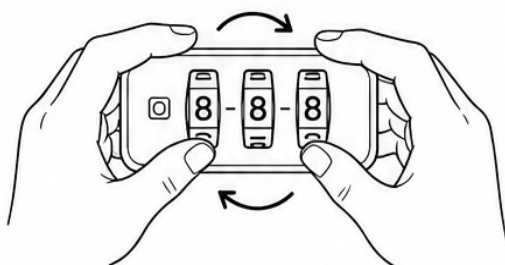

Choose your new 3-digit combination. Turn the dials to your desired numbers. Write it down to remember!

4 LOCK & SAVE

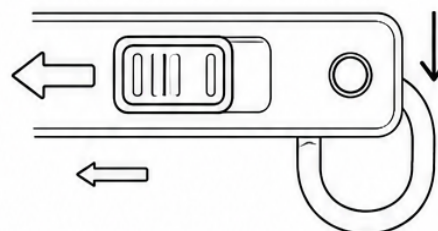

Push the **RELEASE SLIDER** firmly in the direction of the arrow. The Reset Button will pop back out. Then, close the shackle. You are **DONE!**



IMPORTANT:
REMEMBER YOUR CODE!
WRITE IT DOWN NOW!