

20FT X 10FT LUMIÈRE LIGHT WALL DUAL EDGE LIGHTS

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW8X4EDGE

INDOOR
USE

SINGLE
SIDED

DOUBLE
SIDED




SET UP INSTRUCTIONS


Pop Up Frame Assembly



a. Place frame with the adjustable feet facing down.




b. Expand the frame.

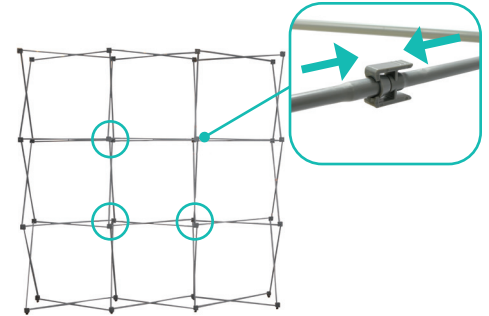


c. Close frame by pushing the outside of the frame until male and female ends connect.


Install Channel Bars

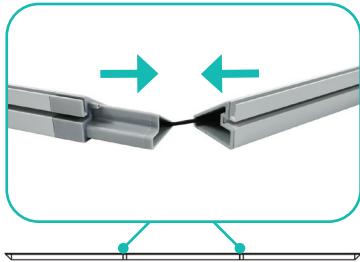

a. Expand each channel bar. Follow bungee to connect.

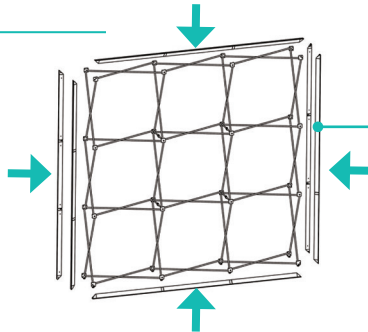

b. Attach channel bars to frame.

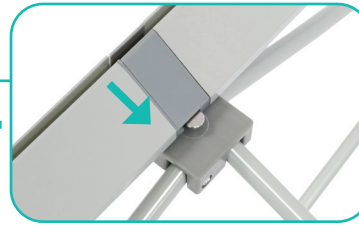


c. Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



d. Attach the top and bottom end caps on each side of the frame.

Dual Edge Light Installation

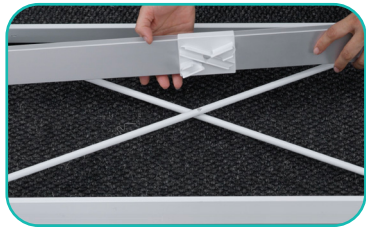

a. Clip dual edge lights to bottom X braces of frame. There should be 1 light strip per section of the frame.



b. Plug Y cables into ports on the ends of the edge light strips. Each Y cable will connect two led strips together. Plug each Y cable into the transformers to complete dual edge light wiring.



Graphic Installation



a. Starting in each corner, insert the silicone edge beading into the grooves of the channels bars



b. Insert the remainder of the beading and work your way across the frame



c. Repeat installation process for back panel, end caps, and blockout panel across the top of the frame.

20FT X 10FT LUMIÈRE LIGHT WALL DUAL EDGE LIGHTS

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW8X4EDGE




SET UP INSTRUCTIONS

Connecting Frames

Left Frame

Right Frame

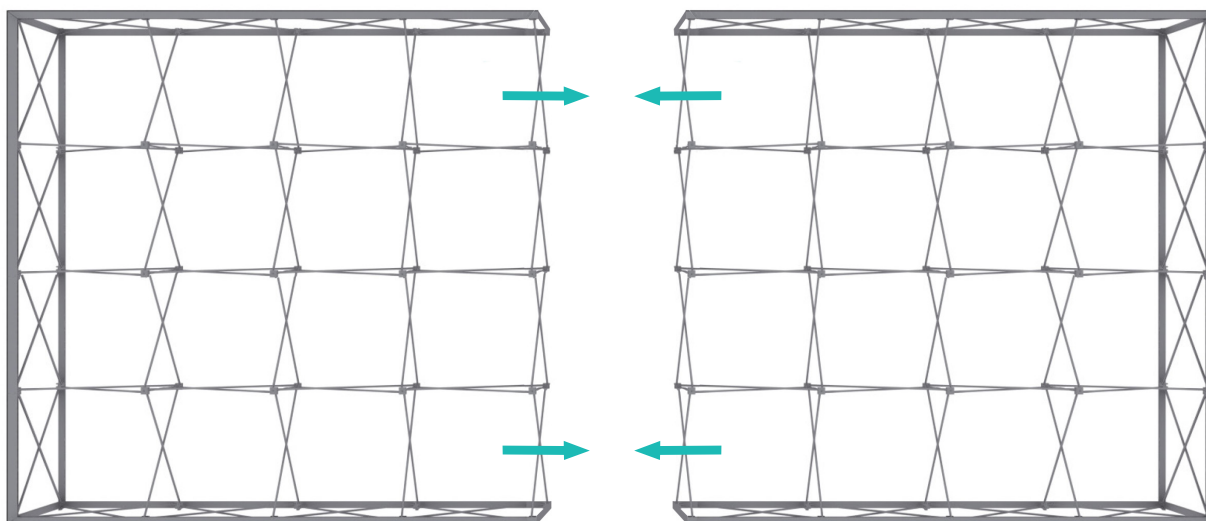


Place the (2) 4x4 frames side by side and connect X-rod with supplied zip ties

Notes:

- Connect frames before installing graphics and ladder lights.
- Do not install the vertical channel bars where the frames will connect.

Frame Connection

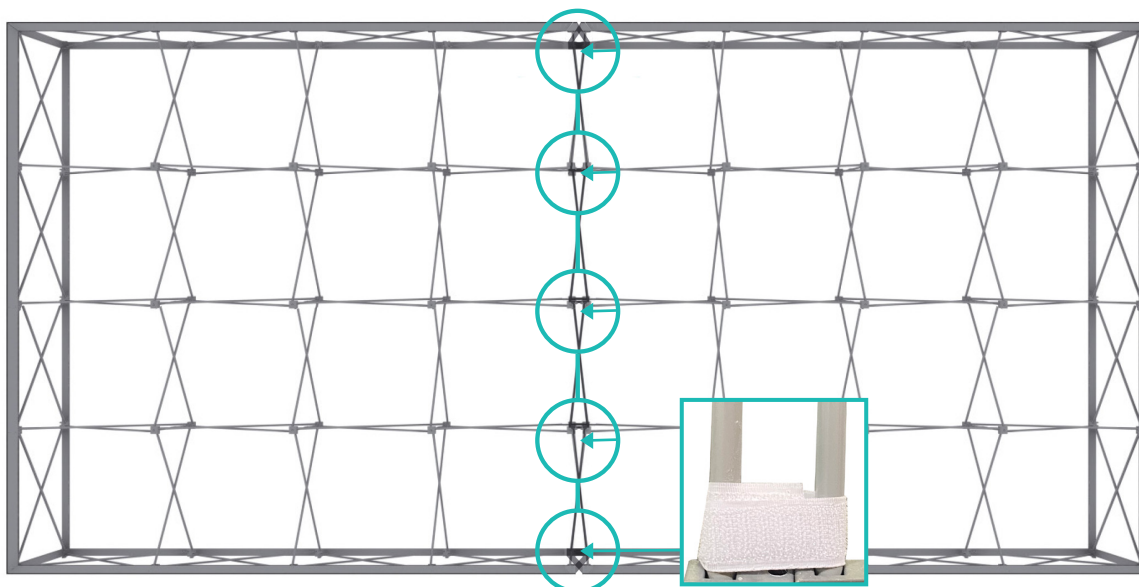

Since the vertical channel bars will create shadows on the graphics they are not used with 1pc graphics. An alternate method to secure frames without using the Channel Bars + LLW-SCON is using the included velcro straps to connect them. Loop the straps around the X-Rods on the front and back of each frame and secure tightly to secure frames. Reference image above for velcro strap placement.