

CASITA CANOPY LED LIGHT KIT

TENTS

PRODUCT CODE: TENT-LED



Rubber Clip Attachment



USB-C port to charge light
USB port to charge cell phones,
tablets, etc

PRODUCT DESCRIPTION

Illuminate your canopy with Casita LED Lights, a rechargeable lighting solution designed specifically for Casita canopy systems. Engineered for both indoor and outdoor use, each LED light bar securely mounts to the frame using durable rubber clips for a clean, integrated installation. Whether you're exhibiting at a trade show, operating a vendor booth, or hosting an outdoor event, Casita LED Lights provide powerful, dependable illumination exactly where you need it.

Compatible with Casita Standard Aluminum & Steel, One Choice Aluminum & Steel, and Casita Air canopy frames, Casita LED Lights are available as complete kits or individual replacement components. Each light bar delivers 665 lumens of bright, even illumination and features three brightness levels along with three selectable color temperatures—2700K (Warm White), 4000K (Neutral White), and 6500K (Cool White)—allowing you to customize your lighting for virtually any environment. An integrated battery level indicator lets you quickly monitor remaining power, while the built-in rechargeable battery fully charges in approximately 4.5 hours via USB-C.

Designed with versatility in mind, each light bar also features an integrated 18W USB output for charging mobile devices such as smartphones, tablets, and other USB-powered electronics while on the go. The rugged waterproof construction is rated to withstand submersion in up to 6 feet (2 meters) of water for up to 30 minutes, making these lights ideal for demanding outdoor conditions. Kits are sized to match your canopy, with 4 light bars for 10 ft frames and 8 light bars for both 15 ft and 20 ft frames. Individual LED light bars and replacement rubber clips are also available separately for replacements or expanding an existing lighting system.

LIGHT CONSTRUCTION

Polycarbonate (PC) and ABS plastic housing with internal aluminum components, incorporating LED light sources and a rechargeable lithium-ion battery

SHIPPING WEIGHTS & DIMENSIONS - 10FT KIT

Shipping Weight	3 lbs
Shipping Dimensions	24"L x 6"W x 6"H

SHIPPING WEIGHTS & DIMENSIONS - 15FT/20 KIT

Shipping Weight	6 lbs
Shipping Dimensions	24"L x 24"W x 6"H

LED INFORMATION

POWER	6.2W (Each light bar)
LUMENS	665 (Each light bar)
CCT	2700K/4000K/6500K
CHARGING INTERFACE	USB-C
BATTERY	3.7V/10400mAh
BATTERY LIFE	5-50 hours
CHARGE TIME	4.5 hours
BRIGHTNESS LEVELS	3
USB PORT OUTPUT	18W

CASITA CANOPY LED LIGHT KIT

TENTS

PRODUCT CODE: TENT-LED

INDOOR
USE

OUTDOOR
USE



3 Brightness Settings
3 Color Temperatures





PARTS LIST

LED LIGHT BAR ONLY (SKU: TENT-LED)



(qty 1)
LED Bar



(qty 1)
USB-C Cable



(qty 2)
Lanyards

PARTS LIST


LIGHT CLIP (SKU: TENT-LED-CLIP)



(qty 1)
Rubber Clip

10FT KITS INCLUDE	
TENT-LED	qty 4
TENT-LED-CLIP	qty 8
15FT/20FT KITS INCLUDE	
TENT-LED	qty 8
TENT-LED-CLIP	qty 16

Product Part

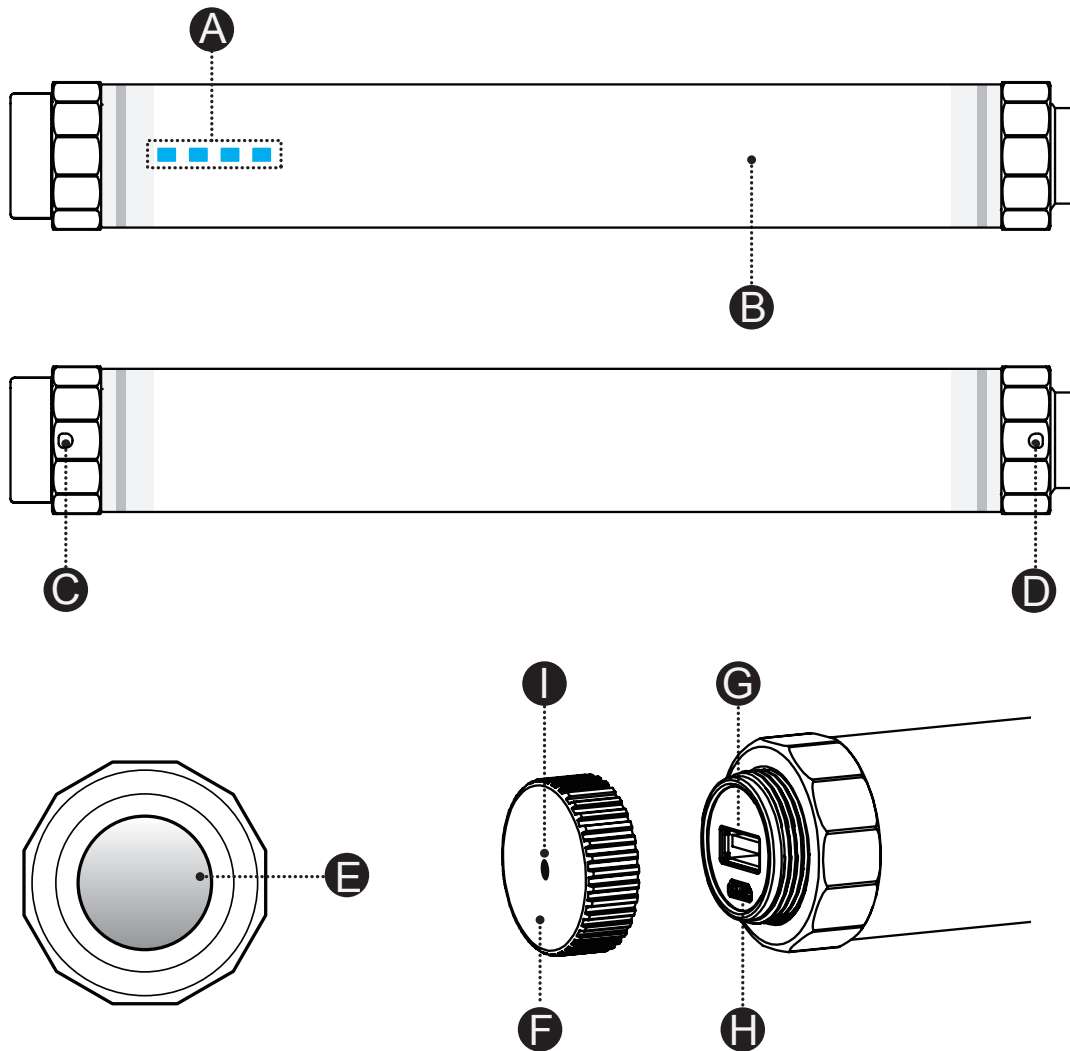

- A** Battery Indicator
- B** Light Cover
- C** **D** Rope Hole
- E** Waterproof Switch (luminous)
- F** Waterproof Cap (unscrew it to recharge)
- G** USB Output
- H** Type-C charging and discharging
- I** Tripod Mount (1/4"-20 thread)

Product Instructions

1. While off, press it to turn the light on (previous setting will be memorized)
2. While on:
 - ① Single press: cycle through level 1, level 2, level 3 and off.
 - ② Double press: cycle through cool white, natural white, mosquito repellent light.
 - ③ Long Press: turn the light off, current setting will be memorized.

Battery Life

1. The battery life is 5-50 hours, it varies depending the level of brightness.
2. If it is used as a powerbank, the battery life varies depending the connected devices.

Mode	Battery Life
Level 1 of white, natural white, warm white	~50hrs
Level 2 of white, natural white, warm white	~11hrs
Level 3 of white, natural white, warm white	~5hrs
Level 1 of mosquito repellent	~45hrs
Level 2 of mosquito repellent	~12hrs
Level 3 of mosquito repellent	~6hrs


Low Battery Warning

The first blue LED will flash to remind users to charge the battery when the battery is low.

Charging Indicator

- 1. The blue LED light will flash 4 times during charging.
- 2. When fully charged, the blue LED light will glow steady. Please disconnect the power supply in time.

Power Status Indicator

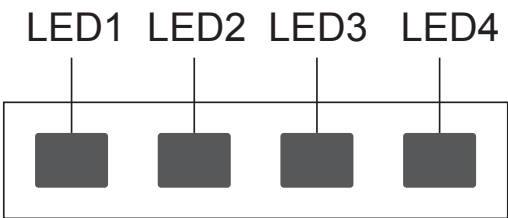

Blue LED Light	Power
1 LED is on	0%~25%
2 LEDs are on	25%~50%
3 LEDs are on	50%~75%
4 LEDs are on	75%~100%